

DAC SERIES
2/2 WAY DIRECT ACTING
SOLENOID VALVE (NC / NO)

Automation
Simplified...



Solenoid Valve

Angle Seat Valve

Rotary Coupling

Pneumatic Directional Control Valve

Actuator




Cylinder

One Touch Fitting

Ball Valve

Butterfly Valve

Country of Origin - INDIA

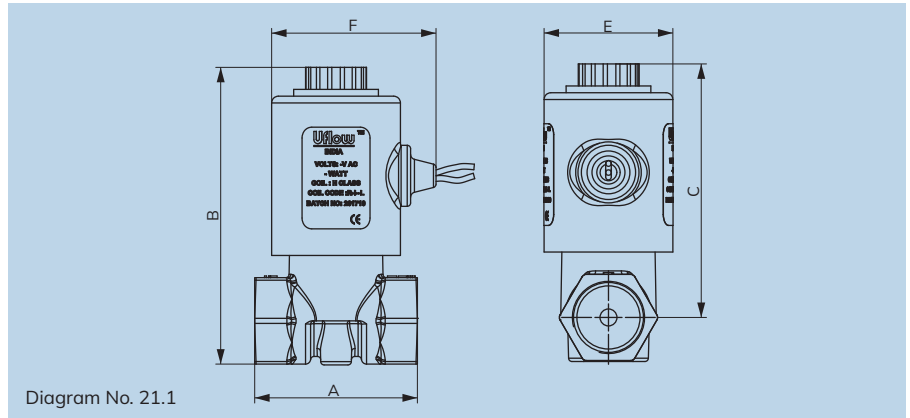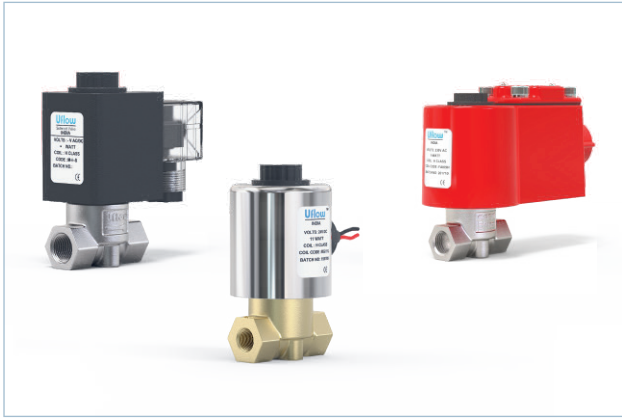

Specifications

Port :	1/8", 1/4", 3/8" & 1/2"(Available BSP / NPT)				
End Connection :	Screwed				
Body Material :	SS ASTM A351 Grade CF8 / CF8M, Forged Brass, Aluminium				
Diaphragm:	Nitrile (NBR)	EPDM	Viton (FKM)	Silicone	
Media Temp:	-30°C to 90°C	-10°C to 140°C	-10°C to 180°C	-10°C to 60°C	
Circumstance Temp :	-10°C to 70°C				
Media :	Air, Chemical, Gas, Oil, Steam, Hot Water				
Main Features :	Internal Parts are in superior corrosion resistance steel, (Equivalent to SS316L) Suitable for Food Industries, Pharmaceuticals, Chemical application & Highly corrosive environment.				
Operating Voltage :	24AC	110AC	230AC	12DC	24DC
Power Consumption :	9W	9W	9W	10W	11W
Coil Features :	High Reliability Unaffected by Voltage Surges. Easy coil changes coil lockable in 4X90 position or freely movable in between as require.				
Coil Housing :	IP65 Epoxy square coil, IP65 Metallic round enclosure, IP67 Flameproof enclosure, IP68 Weatherproof enclosure.				
Optional Feature :	90% Power saver series also available & Latching as per Application.				
Other Specification Data :	Available on Request. - Manual Override				

NOTE: Use of filter in the inlet port is recommended.

Dimension - NC (All dimensions in mm)

All Dimensions are approx.

Model No.	Port Size	Diagram No.	A	B	C	E	F
DAC-DB104E040	1/4"	21.1	43	83	74	38	49
DAC-D104E040	1/4"	21.1	43	83	74	38	49
DAC-DB704E040	3/8"	21.1	48	88	75	38	49
DAC-DB204E040	1/2"	21.1	48	88	75	38	49
DAC-D202I120	1/2"	21.1	55	109	96	50	62
DAC-DB004C020	1/8"	21.1	38	58	49	28	33
DAC-D204E040	1/2"	21.1	48	88	75	38	49

In normally open valve dimension B&C will increase up to 8mm.

Section View



Technical Data

Model No.	Body Material	Port Size	Orifice (mm)		Min. Operating Pressure Kg/cm ²	Max. Operating Pressure Kg/cm ²	Seal & Diaphragm Material	Flow Factor Kv m ³ / hr	
			NC	NO				NC	NO
DAC-DB017E018	Brass	1/8"	1.8	NA	0	60	NBR / FKM / EPDM	0.10	-
DAC-DB115E060	Brass	1/4"	6	NA	0	1	NBR / FKM / EPDM	0.84	-
DAC-DB113E050	Brass	1/4"	5	4	0	4	NBR / FKM / EPDM	0.73	0.54
DAC-DB104E040	Brass	1/4"	4	2.5	0	10	NBR / FKM / EPDM	0.54	0.16
DAC-DB105E030	Brass	1/4"	3	2.5	0	16	NBR / FKM / EPDM	0.20	0.16
DAC-DB111E025	Brass	1/4"	2.5	1.8	0	25	NBR / FKM / EPDM	0.16	0.10
DAC-DB118E020	Brass	1/4"	2	1.3	0	40	NBR / FKM / EPDM	0.11	0.05


Technical Data

Model No.	Body Material	Port Size	Orifice (mm)		Min. Operating Pressure Kg/cm²	Max. Operating Pressure Kg/cm²	Seal & Diaphragm Material	Flow Factor Kv m³ / hr	
			NC	NO				NC	NO
DAC-DB117E018	Brass	¼"	1.8	1.3	0	60	NBR / FKM / EPDM	0.10	0.05
DAC-DB120E015	Brass	¼"	1.5	0.9	0	100	NBR / FKM / EPDM	0.07	0.03
DAC-DB112E013	Brass	¼"	1.3	NA	0	150	NBR / FKM / EPDM	0.05	--
DAC-DB713E050	Brass	⅜"	5	4	0	4	NBR / FKM / EPDM	0.73	0.54
DAC-DB704E040	Brass	⅜"	4	2.5	0	10	NBR / FKM / EPDM	0.54	0.16
DAC-DB705E030	Brass	⅜"	3	2	0	16	NBR / FKM / EPDM	0.20	0.11
DAC-DB711E025	Brass	⅜"	2.5	1.8	0	25	NBR / FKM / EPDM	0.16	0.10
DAC-DB718E020	Brass	⅜"	2	1.5	0	40	NBR / FKM / EPDM	0.11	0.03
DAC-DB717E018	Brass	⅜"	1.8	1.3	0	60	NBR / FKM / EPDM	0.10	0.05
DAC-DB720E015	Brass	⅜"	1.5	0.9	0	100	NBR / FKM / EPDM	0.07	0.03
DAC-DB712E013	Brass	⅜"	1.3	NA	0	150	NBR / FKM / EPDM	0.05	--
DAC-DB215E060	Brass	½"	6	NA	0	1	NBR / FKM / EPDM	0.84	--
DAC-DB213E050	Brass	½"	5	4	0	4	NBR / FKM / EPDM	0.73	0.54
DAC-DB204E040	Brass	½"	4	2.5	0	10	NBR / FKM / EPDM	0.54	0.16
DAC-DB205E030	Brass	½"	3	2.5	0	16	NBR / FKM / EPDM	0.20	0.16
DAC-DB211E025	Brass	½"	2.5	1.8	0	25	NBR / FKM / EPDM	0.16	0.10
DAC-DB218E020	Brass	½"	2	1.3	0	40	NBR / FKM / EPDM	0.11	0.05
DAC-DB217E018	Brass	½"	1.8	1.3	0	60	NBR / FKM / EPDM	0.10	0.05
DAC-DB220E015	Brass	½"	1.5	0.9	0	100	NBR / FKM / EPDM	0.07	0.03
DAC-DB212E013	Brass	½"	1.3	NA	0	150	NBR / FKM / EPDM	0.05	--
DAC-D017E018	SS304	⅙"	1.8	NA	0	60	NBR / FKM / EPDM	0.16	--
DAC-D115E060	SS304	¼"	6	6	0	1	NBR / FKM / EPDM	0.84	0.84
DAC-D113E050	SS304	¼"	5	4	0	4	NBR / FKM / EPDM	0.73	0.54
DAC-D104E040	SS304	¼"	4	2.5	0	10	NBR / FKM / EPDM	0.54	0.16
DAC-D105E030	SS304	¼"	3	2	0	16	NBR / FKM / EPDM	0.20	0.11
DAC-D111E025	SS304	¼"	2.5	1.8	0	25	NBR / FKM / EPDM	0.16	0.10
DAC-D118E020	SS304	¼"	2	1.3	0	40	NBR / FKM / EPDM	0.11	0.05
DAC-D117E018	SS304	¼"	1.8	1.3	0	60	NBR / FKM / EPDM	0.10	0.05
DAC-D120E015	SS304	¼"	1.5	0.9	0	100	NBR / FKM / EPDM	0.07	0.03
DAC-D112E013	SS304	¼"	1.3	NA	0	150	NBR / FKM / EPDM	0.05	--
DAC-D713E050	SS304	⅜"	5	4	0	4	NBR / FKM / EPDM	0.73	0.54
DAC-D704E040	SS304	⅜"	4	2.5	0	10	NBR / FKM / EPDM	0.54	0.16
DAC-D705E030	SS304	⅜"	3	2	0	16	NBR / FKM / EPDM	0.20	0.11
DAC-D711E025	SS304	⅜"	2.5	1.8	0	25	NBR / FKM / EPDM	0.16	0.10
DAC-D718E020	SS304	⅜"	2	1.3	0	40	NBR / FKM / EPDM	0.11	0.05
DAC-D717E018	SS304	⅜"	1.8	1.3	0	60	NBR / FKM / EPDM	0.10	0.05
DAC-D720E015	SS304	⅜"	1.5	0.9	0	100	NBR / FKM / EPDM	0.07	0.03
DAC-D712E013	SS304	⅜"	1.3	NA	0	150	NBR / FKM / EPDM	0.05	--
DAC-DS226E170	SS304	½"	17	NA	0	0.200	NBR / SI / FKM / EPDM	3.20	--
DAC-D213E050	SS304	½"	5	4	0	4	NBR / FKM / EPDM	0.73	0.54
DAC-D204E040	SS304	½"	4	2.5	0	10	NBR / FKM / EPDM	0.54	0.16
DAC-D205E030	SS304	½"	3	2.5	0	16	NBR / FKM / EPDM	0.20	0.16
DAC-D211E025	SS304	½"	2.5	1.8	0	25	NBR / FKM / EPDM	0.16	0.10
DAC-D218E020	SS304	½"	2	1.3	0	40	NBR / FKM / EPDM	0.11	0.05
DAC-D217E018	SS304	½"	1.8	1.3	0	60	NBR / FKM / EPDM	0.10	0.05

Technical Data

Model No.	Body Material	Port Size	Orifice (mm)		Min. Operating Pressure Kg/cm ²	Max. Operating Pressure Kg/cm ²	Seal & Diaphragm Material	Flow Factor Kv m ³ / hr	
			NC	NO				NC	NO
DAC-D220E015	SS304	½"	1.5	0.9	0	100	NBR / FKM / EPDM	0.07	0.03
DAC-D212E013	SS304	½"	1.3	NA	0	150	NBR / FKM / EPDM	0.05	--
DAC-DS202I120	SS304	½"	12	NA	0	2	NBR / SI / FKM / EPDM	2.10	--
DAC-D202I120	SS304	½"	12	NA	0	2	NBR / FKM / EPDM	2.10	--
DAC-D201I120	SS304	½"	12	12	0	0.500	NBR / FKM / EPDM	2.10	2.10
DAC-DB014C030	Brass	⅛"	3	NA	0	3	NBR / FKM / EPDM	0.20	--
DAC-DB004C020	Brass	⅛"	2	NA	0	10	NBR / FKM / EPDM	0.11	--
DAC-DB104C020	Brass	¼"	2	NA	0	10	NBR / FKM / EPDM	0.11	--
DAC-D102C020	SS304	¼"	2	NA	0	2	NBR / FKM / EPDM	0.11	--
DAC-D103C025	SS304	¼"	2.5	NA	0	7	NBR / FKM / EPDM	0.16	--
DAC-D104C020	SS304	¼"	2	NA	0	10	NBR / FKM / EPDM	0.11	--

DAC - SERIES DIRECT ACTING SOLENOID VALVE MODEL CHART

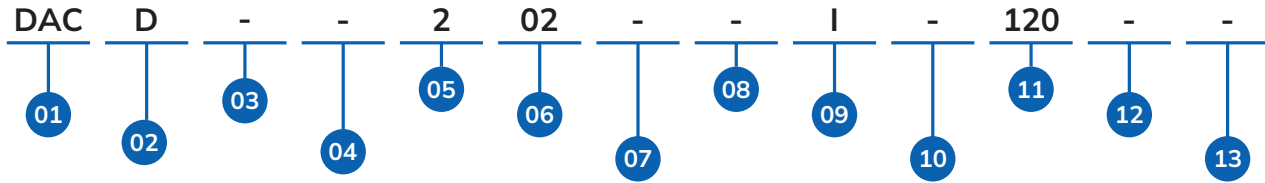

01	SERIES
	DAC

02	PRODUCT TYPE
D	2 Way
T	3 Way

03	BODY MATERIAL
-	CF8
M	CF8M
B	Brass Forge
C	CF3M

04	SEAL MATERIAL
-	Nitrile
E	EPDM
V	Viton
S	Silicone
F	SPL Viton
U	Fluoro Silicone
J	Viton GLT
P	PTFE
T	Low Temp NBR
D	HNBR
K	PEEK
N	Buna N

05	PORT SIZE
-	1/8"
1	1/4"
2	1/2"
3	3/4"
7	3/8"
8	M14
O	Manifold Mount

06	PRESSURE RANGE	
00	0 to 350 Mbar	21 0 to 20 Bar
01	0 to 500 Mbar	26 0 to 200 MBar
02	0 to 2 Bar	30 0 to 1.5 Bar
03	0 to 7 Bar	31 0 to 6 Bar
04	0 to 10 Bar	32 0 to 8 Bar
05	0 to 16 Bar	34 0 to 10 PSI
07	0.5 to 8.5 Bar	38 0 to 12 Bar
11	0 to 25 Bar	39 0 to 150 Mbar
12	0 to 150 Bar	42 0 to 13 Bar
13	0 to 4 Bar	43 0 to 15 Bar
14	0 to 3 Bar	44 0 to 18 Bar
15	0 to 1 Bar	46 0 to 21 Bar
17	0 to 60 Bar	47 0 to 35 Bra
18	0 to 40 Bar	48 20 to 110 Bar
19	0 to 5 Bar	52 -1 to 1 Bar
20	0 to 100 Bar	

07	PORT CONNECTION
-	BSP
N	NPT
P	BSPT
R1	Namur Bsp
T1	Namur Npt
2	Manifold
4	UNF
9	MM

08	VALVE POSITION
-	NC
Z	NO
Y	Universal
D1	Diverting
X	Mixing
R	BI directional NC
S	BI directional NO

09	COIL DIA
A	8 MM AC
B	8 MM DC
C	10 MM AC
D	10 MM DC
E	14 MM AC
F	14 MM DC
G	14 MM FLP AC
H	14 MM FLP DC
I	18 MM AC
J	18 MM DC
K	30 MM AC
L	30 MM DC
M	28 MM
O	5.5 MM DC
Q	5 MM DC
T	12 MM AC
U	12 MM DC
V	18 MM FLP AC
W	18 MM FLP DC
5	14 MM SS FLP AC
6	14 MM SS FLP DC
7	14mm Bottom Cable Entry Exp. AC
7D	14mm Bottom Cable Entry Exp. DC
8	18mm Bottom Cable Entry Exp.AC
8D	18mm Bottom Cable Entry Exp.AC

10	FEATURES
-	W/O Mor
M	Turn Mor
P	Push Mor
M1	Push & Turn Mor
P1	Pull Mor
3	3 Position Mor

12	CONFIGURATION
-	REGULAR
C1	CONFIG 1
...	...
C9	CONFIG 9
CA	CONFIG 10
CB	CONFIG 11

13	VERSION
-	VERSION 0
V1	VERSION 1
...	...
V9	VERSION 9
VA	VERSION 10

11	ORIFICE IN MM	
100	10MM ORIFICE	016 1.6MM ORIFICE
120	12MM ORIFICE	018 1.8MM ORIFICE
152	15.2MM ORIFICE	020 2MM ORIFICE
170	17MM ORIFICE	022 2.2MM ORIFICE
180	18MM ORIFICE	025 2.5MM ORIFICE
200	20MM ORIFICE	028 2.8MM ORIFICE
250	25MM ORIFICE	030 3MM ORIFICE
300	30MM ORIFICE	031 3.1MM ORIFICE
005	0.5MM ORIFICE	035 3.5MM ORIFICE
006	0.6MM ORIFICE	040 4MM ORIFICE
007	0.7MM ORIFICE	045 4.5MM ORIFICE
008	0.8MM ORIFICE	050 5MM ORIFICE
009	0.9MM ORIFICE	060 6MM ORIFICE
010	1MM ORIFICE	064 6.4MM ORIFICE
012	1.2MM ORIFICE	070 7MM ORIFICE
013	1.3MM ORIFICE	080 8MM ORIFICE
015	1.5MM ORIFICE	

DAC-D202I120

1/2" 2 WAY DIRECT ACTING CF8-NITRILE-0 TO 2 Bar-
BSP-NC-18MM AC-12MM ORIFICE