

COMPACT VALVE - 1/8

Series DS2

Cat No DS2 - 01 - 11

MANUALLY OPERATED VALVE - G1/8

Features

- ☐ Compact size
- ☐ Suitable for panel mounting
- ☐ Mounting provision for individual unit




Technical Specifications

Model	DS2
Type	3/2, 5/2
Design	Spool type
Port size	Inlet, Outlet, Exhaust - G1/8
Medium	Compressed air - Dry, filtered, lubricated
Maximum working pressure	8 bar
Recommended oil for lubrication	ISO VG32 (Servo system 32)
Ambient temperature	-10° to +60° C
Medium temperature	+5° to +50° C
Flow @	450 lts/min
Materials of construction	Aluminium, Nitrile, Brass, Acetal

@ Inlet pressure 6 bar, and pressure drop 1 bar

3 / 2 Hand lever operated valve with spring return

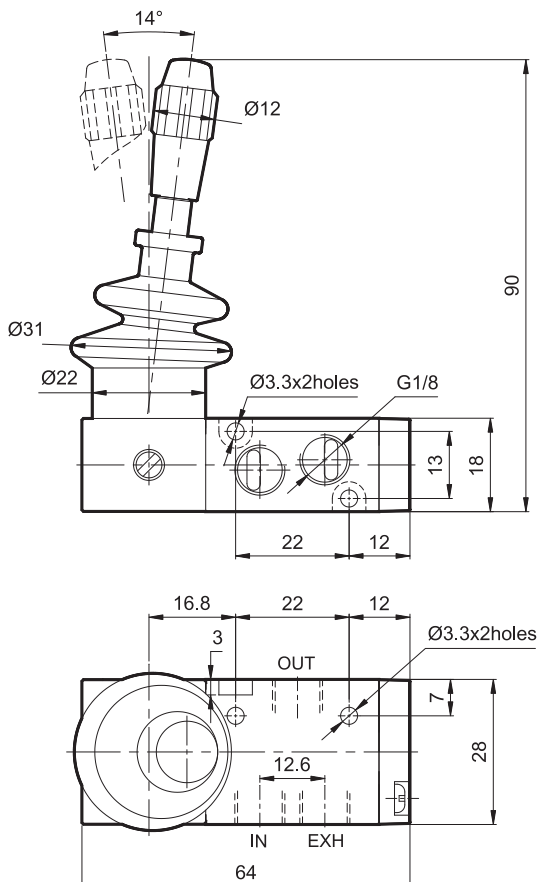

1 - Inlet, 2 - Outlet, 3 - Exhaust


Ordering No	DS234HR60	DS244HR60
Type	Normally open	Normally closed
Symbol		

COMPACT VALVE - 1/8

Series DS2

Cat No DS2 - 01 - 11


3 / 2 Hand lever operated valve with detent

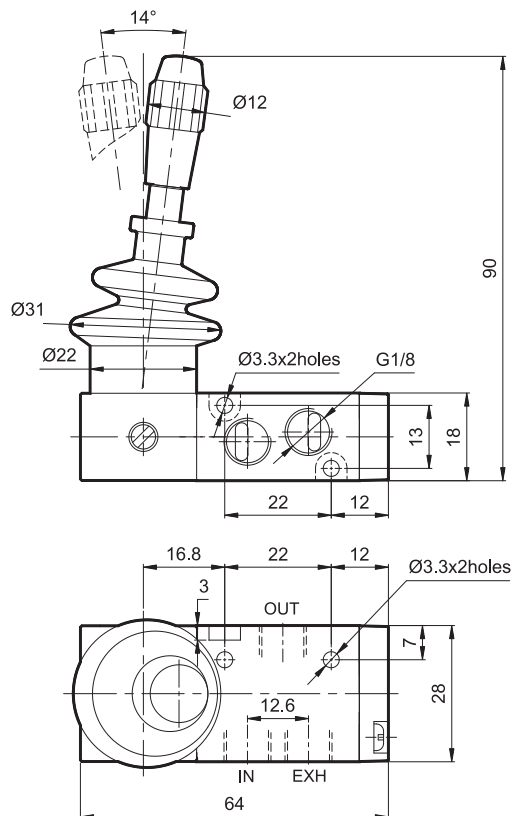

1 - Inlet, 2 - Outlet, 3 - Exhaust

Ordering No	DS234HD60	DS244HD60
Type	Normally open	Normally closed
Symbol		

5 / 2 Hand lever operated valve with spring return

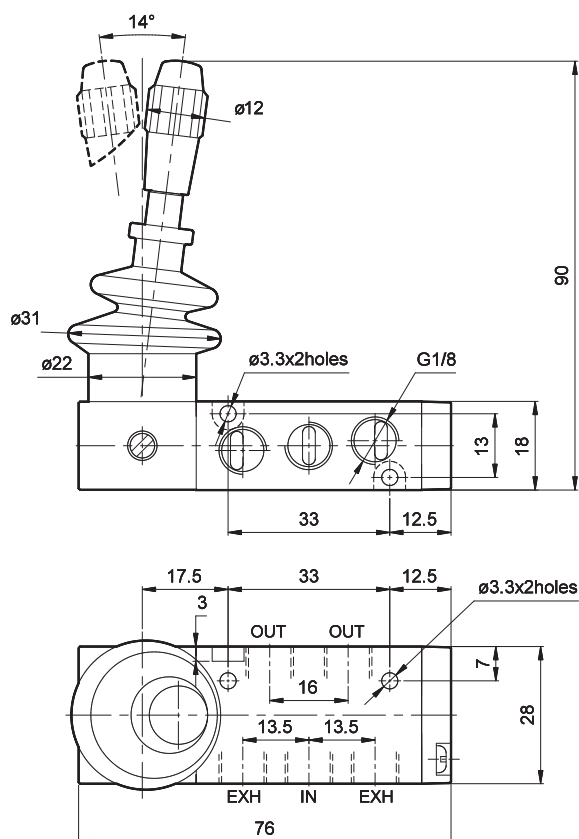

1 - Inlet, 2,4 - Outlet, 3,5 - Exhaust


Ordering No	DS254HR60
Symbol	

COMPACT VALVE - 1/8

Series DS2

Cat No DS2 - 01 - 11


5 / 2 Hand lever operated valve with detent

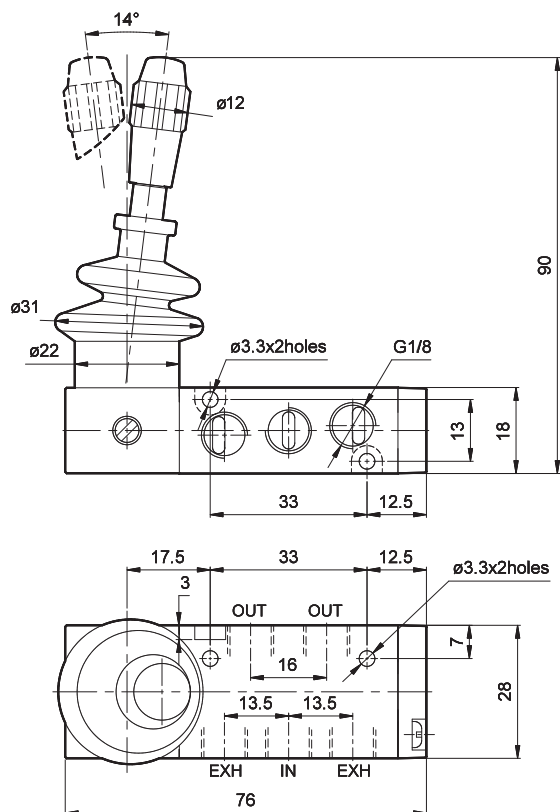

1 - Inlet, 2,4 - Outlet, 3,5 - Exhaust

Ordering No	DS254HD60
Symbol	

3 / 2 Push Pull operated valve with spring return

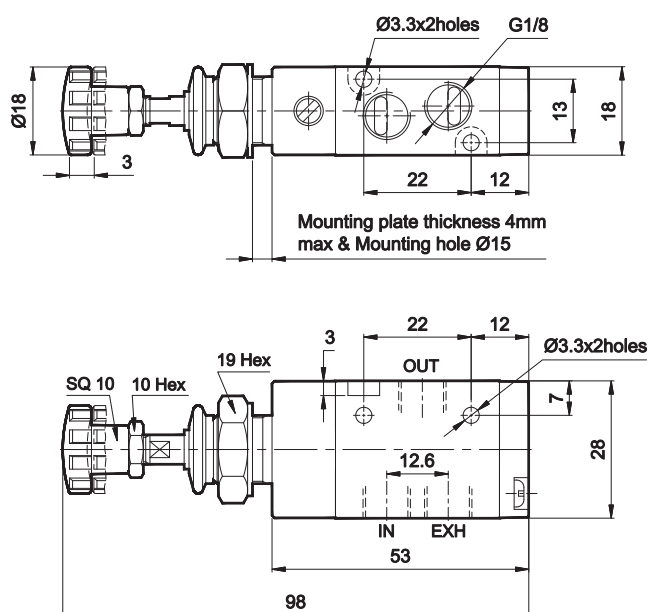

1 - Inlet, 2 - Outlet, 3 - Exhaust


Ordering No	DS234PR60	DS244PR60
Type	Normally open	Normally closed
Symbol		

COMPACT VALVE - 1/8

Series DS2

Cat No DS2 - 01 - 11

5 / 2 Push Pull operated valve with detent

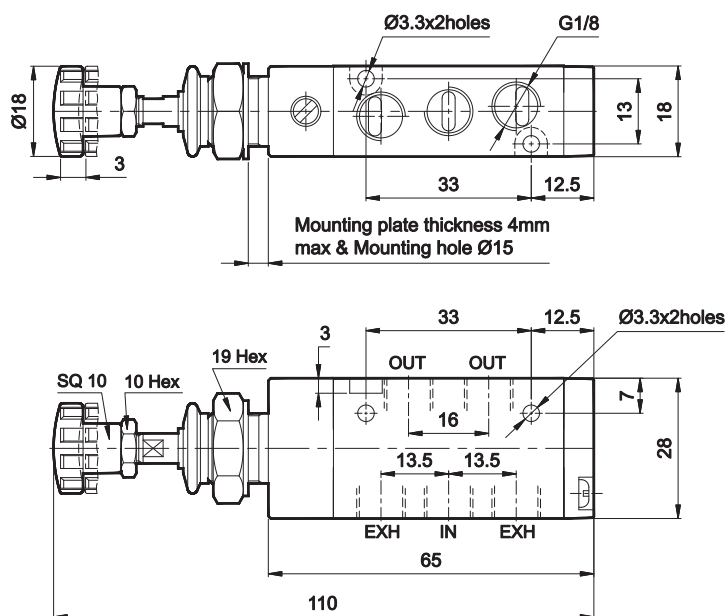

1 - Inlet, 2,4 - Outlet, 3,5 - Exhaust

Ordering No	DS254PD60
Symbol	

How to order

While ordering valve, mention the ordering number given in the corresponding tables.