

Automation
Simplified...



Solenoid Valve

Angle Seat Valve

Rotary Coupling

Pneumatic Directional Control Valve

Actuator

Cylinder

One Touch Fitting

Ball Valve

Butterfly Valve

Country of Origin - INDIA

Butterfly Valve Lug Type - BL Series

Specifications


End Connection :	Lug
Size :	DN50 - DN300
Suitable :	ASME B16.5 150#
Pressure Range :	PN06, PN10, PN16
Leakage Class :	100% Tightness at fully differential pressure
Standard :	API 609, BS 5155, ISO 5211, API 598, ASME B16.5
Body Material :	Cast Iron(CI), SGI, WCB, CF8, CF8M
Disc Material :	SGI, CF8, CF8M, WCB
Stem Material :	SS410, SS304, SS316
Body Liner / Seat Material :	NBR, EPDM, VITON
Shaft Bearing Material :	PTFE
Diaphragm :	PTFE
Media Temp :	

PTFE	RPTFE	CFT	GFT
-30°C to 180°C	-30°C to 200°C	-30°C to 200°C	-30°C to 200°C

Features

- ✓ Bi-directional zero leakage butterfly valve.
- ✓ ISO Pad for mounting, Gear Operator / Actuator
- ✓ Extremely small play between the stem and disc due to 'Double D' drive.
- ✓ Accurate dual stem sealing prevents leakage.
- ✓ Standard flanged drilling : PN10/PN16, JIS 10K/16K, ASME 125/150#
- ✓ 100% Tested With Pneumatic And Fluid (Water) Media.
- ✓ Design Standard : ISO 5211, API 609, ASME B16.5 150#.
- ✓ Face to Face Dimension : API 609 (CAT A).
- ✓ Operator mounting flange : As per ISO 5211.
- ✓ Operator : Hand Lever / Gear / Actuator
- ✓ Leakage Class : 100% tightness at full differential Pressure.

Hand Lever Operated Lug Type Butterfly Valve

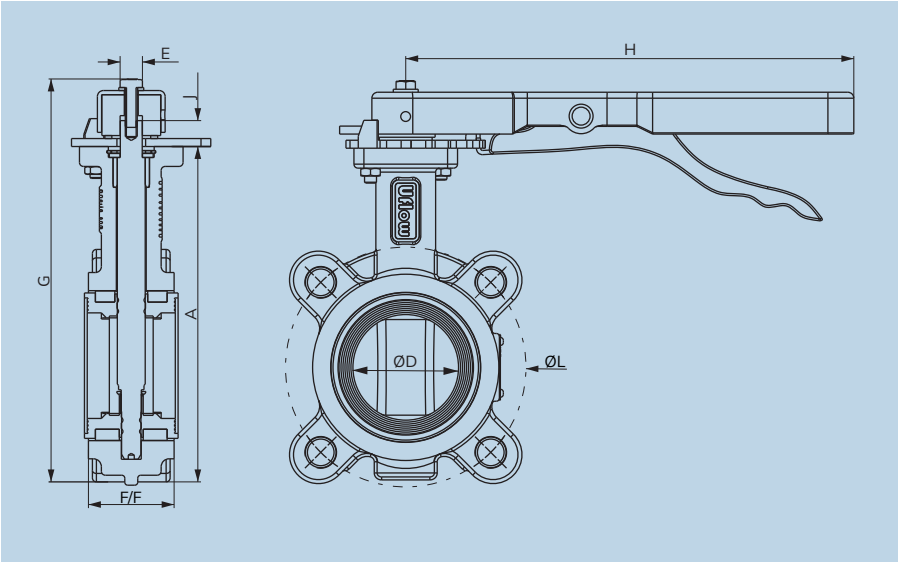


Technical Data (All dimensions are in mm)

All dimensions are approx.

Size	A	ØD	F/F	ØL	G	J	H	E	MOUNTING FLANGE
50 MM	170	50	43	120	204	13	225	11	F05
65 MM	192	65	46	140	226	12	225	11	F05
80 MM	219	80	46	152.5	252	14	225	11	F05
100 MM	258	100	52	190.5	289	17	260	14	F07
125 MM	287	125	56	216	320	20	260	17	F07
150 MM	318	150	56	241	353	19	260	17	F07
200 MM	393	200	60	298	431	22	290	22	F10
250 MM	465	250	68	362	505	25	290	22	F10

Pneumatic Operated Lug Type Butterfly Valve - PN10

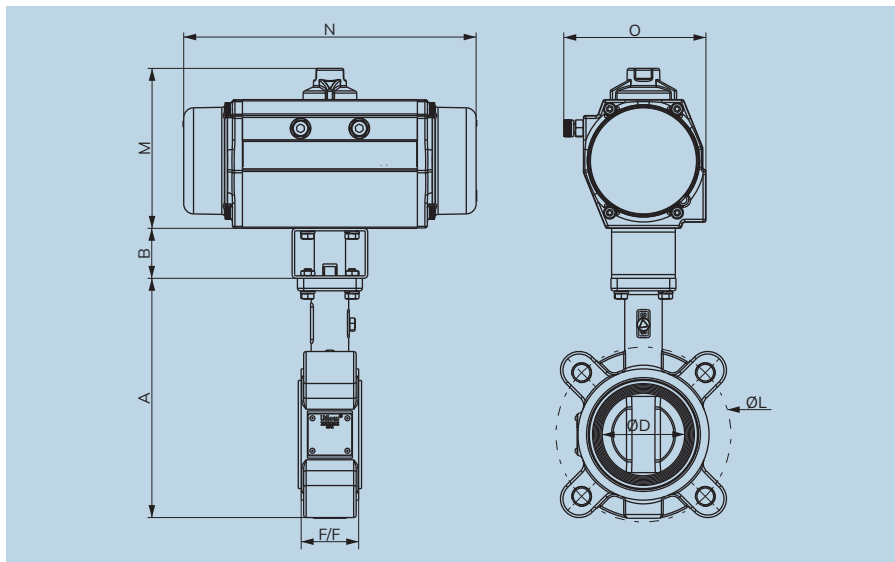

Technical Data - Butterfly Valve with Double Acting Actuator (All dimensions are in mm)

All dimensions are approx.

Size	Actuator	Coupler	A	B	ØD	F/F	ØL	M	N	O	Mounting Flange
50 MM	50	NA	170	-	50	43	120	99	130	85	F05
65 MM	50	NA	192	-	65	46	140	99	130	85	F05
80 MM	50	NA	219	-	80	46	152.5	99	130	85	F05
100 MM	63	NA	258	-	100	52	190.5	112	147	105	F07
125 MM	80	NA	287	-	125	56	216	128	170	114	F07
150 MM	80	NA	318	-	150	56	241	128	170	114	F07
200 MM	100	NA	393	-	200	60	298	154	220	150	F10
250 MM	125	NA	465	-	250	68	362	185	389	174	F10
300 MM	150	NA	552	-	300	78	432	219	465	205	F12


Technical Data - Butterfly Valve with Single Acting Actuator (All dimensions are in mm)

All dimensions are approx.

Size	Actuator	Coupler	A	B	ØD	F/F	ØL	M	N	O	Mounting Flange
50 MM	50	NA	170	-	50	43	120	99	162	84.9	F05
65 MM	63	C1455V0	192	40	65	46	140	112	202	105	F05
80 MM	80	C1755V0	219	40	80	46	152.5	128	234	114	F05
100 MM	100	C4277V0	258	40	100	52	190.5	153	324	151	F07
125 MM	100	C7277V0	287	40	125	56	216	153	324	151	F07
150 MM	125	C7270V0	318	61	150	56	241	185	389	173	F07
200 MM	150	C2800V0	393	61	200	60	298	219	465	205	F10
250 MM	150	C2800V0	465	61	250	68	362	219	465	205	F10

Butterfly Valve Lug Type - BL Series

Pneumatic Operated Lug Type Butterfly Valve - PN16

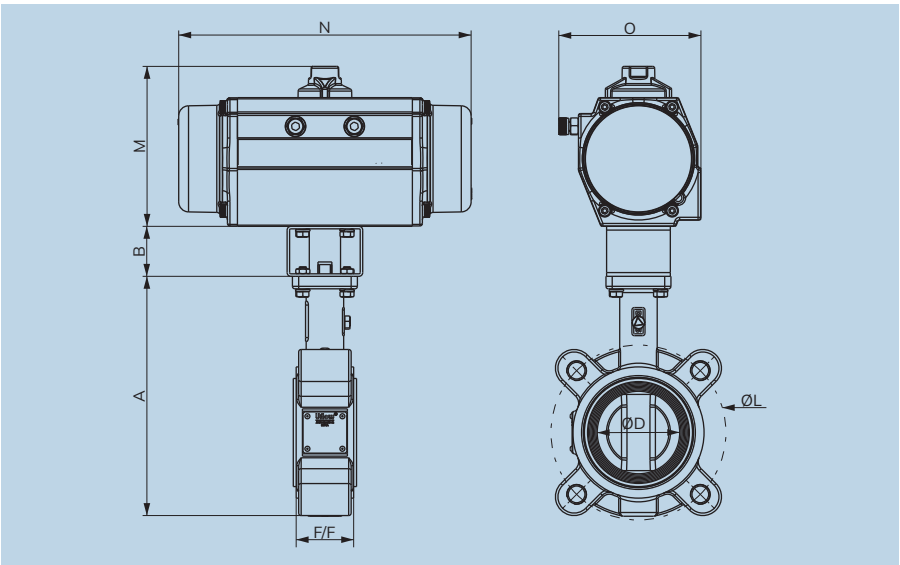


Technical Data - Butterfly Valve with Double Acting Actuator (All dimensions are in mm) All dimensions are approx.

Size	Actuator	Coupler	A	B	ØD	F/F	ØL	M	N	O	Mounting Flange
50 MM	50	NA	170	-	50	43	120	99	130	85	F05
65 MM	50	NA	192	-	65	46	140	99	130	85	F05
80 MM	63	C1455V0	219	40	80	46	152.5	112	147	105	F05
100 MM	80	C4777V0	258	40	100	52	190.5	128	170	114	F07
125 MM	80	NA	287	-	125	56	216	128	170	114	F07
150 MM	100	C7277V0	318	40	150	56	241	154	220	150	F07
200 MM	125	NA	393	-	200	60	298	185	389	173	F10
250 MM	150	C2800V0	465	61	250	68	362	219	465	205	F10

Technical Data - Butterfly Valve with Single Acting Actuator (All dimension are in mm) All dimensions are approx.

Size	Actuator	Coupler	A	B	ØD	F/F	ØL	M	N	O	Mounting Flange
50 MM	80	C1755V0	170	40	50	43	120	128	234	114	F05
65 MM	80	C1755V0	192	40	65	46	140	128	234	114	F05
80 MM	100	C1257V0	219	40	80	46	152.5	153.5	324	151	F05
100 MM	100	C4277V0	258	40	100	52	190.5	153.5	324	151	F07
125 MM	125	C7270V0	287	61	125	56	216	185	389	173	F07
150 MM	150	C7870V0	318	61	150	56	241	219	465	205	F07

Gear Box Operated Lug Type Butterfly Valve

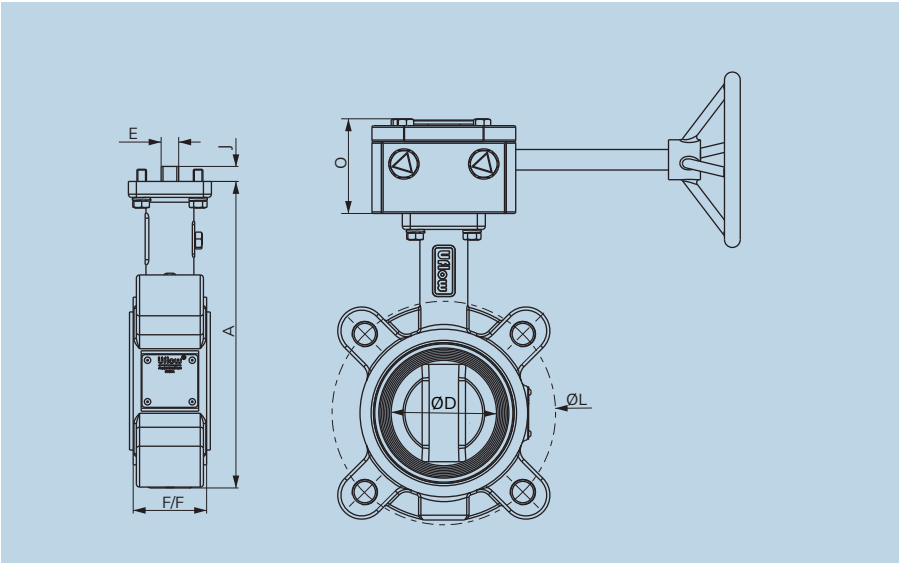


Technical Data (All dimensions are in mm)

All dimensions are approx.

Size	A	ØD	F/F	ØL	E	J	O	Mounting Flange
50 MM	170	50	43	120	11	13	50	F05
65 MM	192	65	46	140	11	12	50	F05
80 MM	219	80	46	153	11	14	50	F05
100 MM	258	100	52	191	14	17	53	F07
125 MM	287	125	56	216	17	20	53	F07
150 MM	318	150	56	241	17	19	53	F07
200 MM	393	200	60	298	22	22	63	F10
250 MM	465	250	68	362	22	25	63	F10
300 MM	552	300	78	432	27	32	70	F12

BL - SERIES LUG TYPE BUTTERFLY VALVE MODEL CHART

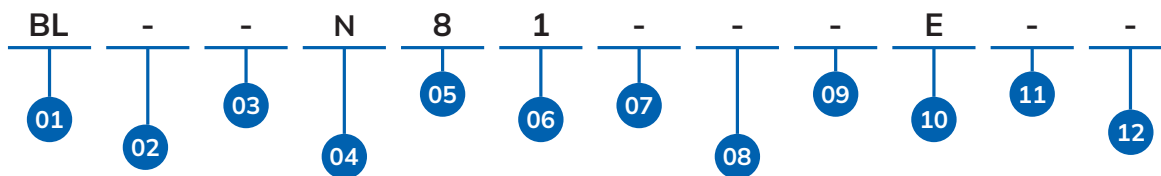

01	SERIES
	BL

02	PRODUCT TYPE
-	Butterfly Valve Lug Type

03	BODY MATERIAL
-	CF8
I	CI
S	SGI
K	Ductile Iron
W	WCB
M	CF8M
V	CF3M

04	SEAL MATERIAL
-	EPDM
N	NBR
T	VITON
L	SILICONE
U	BUNA N
Z	EPDM FG

05	PORT SIZE
8	2"
9	2-1/2"
A	3"
B	4"
C	5"
D	6"
E	8"
F	10"
G	12"

06	PRESSURE CLASS
1	PN10
2	PN16
3	PN6

07	FLANGE SELECTION
-	150 # PCD
B	PN10 PCD
C	PN16 PCD
D	10K PCD
F	16K PCD
H	AS2129 Table E

08	DISC MATERIAL
-	CF8
M	CF8M
W	WCB
S	SGI
K	Ductile Iron
V	CF3M

09	STEM MATERIAL
-	SS 304
N	SS 410
P	SS 316L
D	SS 316
T	SS 416

10	OPERATION
-	Actuator Operated
R	Bare Stem
E	Manual Operated
G	Gear Operated
U	Manual Operated Ss304
L	Electric Actuator Operated
4	Actuator With Gear

11	APPROVALS
-	NO APPROVALS

12	CONFIG
-	REGULAR
C1	CONFIG 1
C2	CONFIG 2
C3	CONFIG 3
...	...
C9	CONFIG 9
CA	CONFIG 10
CB	CONFIG 11

13	VERSION
-	VERSION 0
V1	VERSION 1
V2	VERSION 2
V3	VERSION 3
...	...
V9	VERSION 9
VA	VERSION 10
VB	VERSION 11