

AUTO DRAIN VALVE WITH FILTER BALL VALVE (NC)

Automation
Simplified...



Solenoid Valve

Angle Seat Valve

Rotary Coupling

Pneumatic Directional Control Valve

Actuator


Cylinder

One Touch Fitting

Ball Valve

Butterfly Valve

Country of Origin - INDIA




Specifications

Port :	1/2" - BSP Male & 1/4" - BSP Female & Thread	Operating Voltage :	230V AC
End Connection :	Screwed	Power Consumption :	08W
Body Material :	Brass	Coil Features :	High Reliability Unaffected by Voltage Surges. Easy coil changes coil lockable in 4X90 position or freely movable in between as require.
Seal Material :	PTFE	Coil Housing :	Epoxy square coil
Media Temp :	-60° C to 180° C	Other Specification Data :	Available on Request
Circumstance Temp :	-10°C to 70°C		
Media :	Air, Water, Chemical, Gas		
Main Features :	☒ Internal Parts are in superior corrosion resistance steel ☒ Complete Assembly ready to Install		

NOTE: Specification may change without prior notice.

Technical Data

Valve Model No.	Coil Model No.	Body Material	Pipe (Inch)	Orifice (mm)	Min. Operating Pressure Kg/cm ²	Max. Operating Pressure Kg/cm ²	Seal & Diaphragm Material	Flow Factor Kv m ³ / hr
ADB-305BT019	MAD08B	Brass	1/2"	1.9	0	16	PTFE	0.11

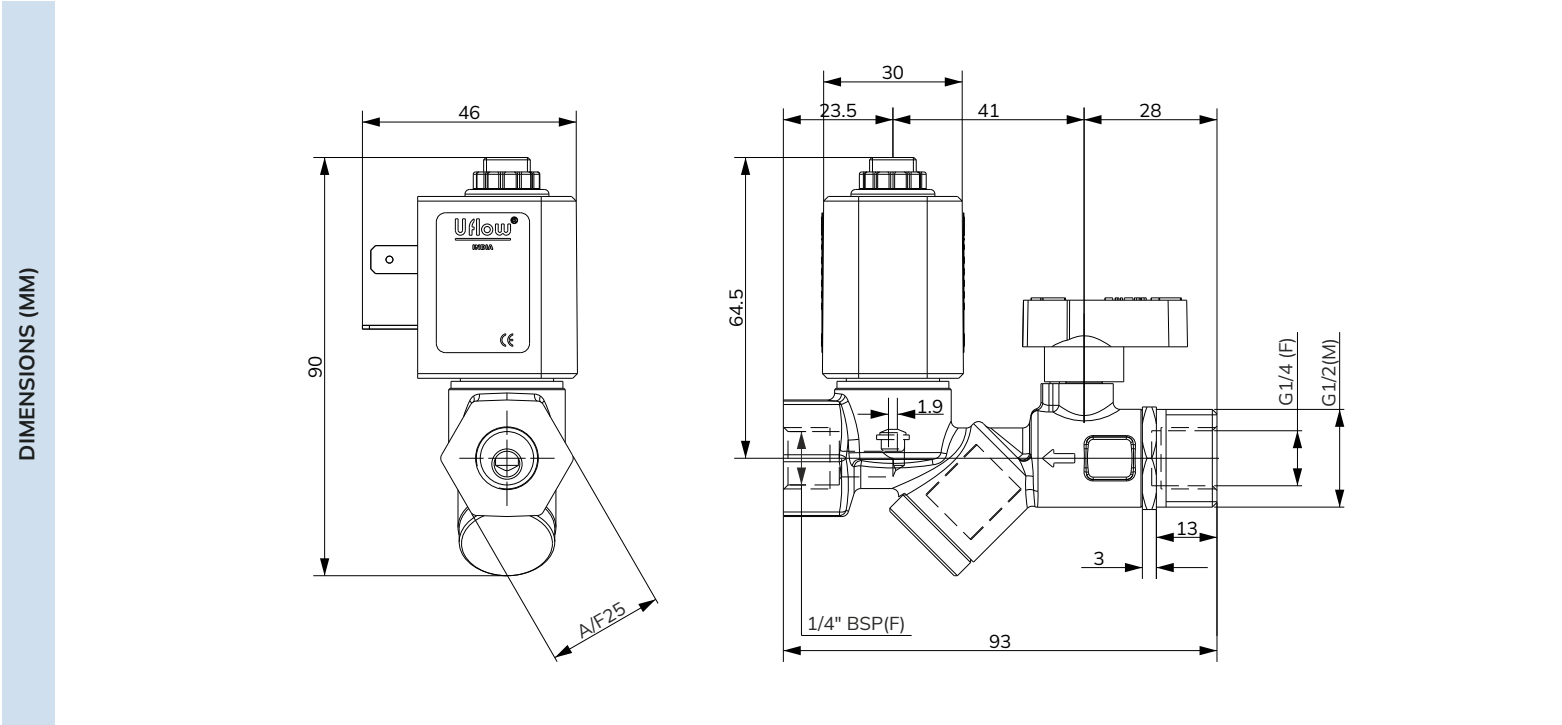

* All dimensions are approx